
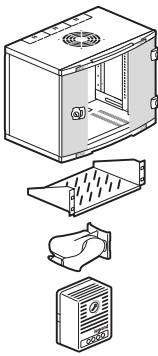
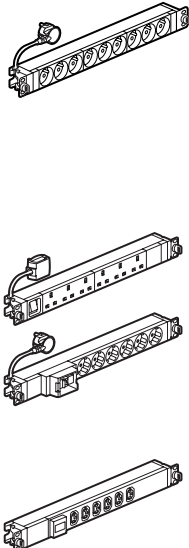


Selection chart for equipment and cabinets

configure your LCS² system (continued)



LCS² 19" WALL-MOUNTING CABINETS AND EQUIPMENT (p. 739)				FIXED		PIVOTING
				Depth 400 mm	Depth 580 mm	Depth 600 mm
	6 U	Height 350 mm x width 600 mm		0 462 00	-	-
	9 U	Height 500 mm x width 600 mm		0 462 01	0 462 06	0 462 11
	12 U	Height 600 mm x width 600 mm		0 462 02	0 462 07	0 462 12
	16 U	Height 800 mm x width 600 mm		0 462 03	0 462 08	0 462 13
	21 U	Height 1000 mm x width 600 mm		-	0 462 09	0 462 14
	Fixed shelves	Depth 115 mm		0 465 00	0 465 00	0 465 00
		Depth 200 mm		0 465 01	0 465 01	0 465 01
		Depth 360 mm		-	0 465 02	0 465 02
	Equipment	Cable entry plate with brush		-	-	0 462 55
		Cable management ring		0 465 41 ⁽¹⁾	0 465 41/42	-
		230 V ~ fan		0 462 60	0 462 60	0 462 60
		Thermostat		0 348 48	0 348 48	0 348 48
Set of 4 casters		-	-	0 462 64		
1U 19" POWER DISTRIBUTION UNITS (p. 734)						
	PDU standard	6 outlets	German standard	6 468 06		
			French standard	6 468 05		
			C19 (IEC 60320 standard)	6 468 07		
		8 outlets	British standard	6 468 13		
			6 C13 + 2 C19 (IEC 60320 standard)	6 468 09		
	PDU with power indicator	9 outlets	German standard	6 468 12		
			French standard	6 468 10		
			Tamperproof French standard	6 468 11		
		12 outlets	C13 (IEC 60320 standard)	6 468 15		
	PDU with luminous switch	6 outlets	German standard	6 468 21		
			French standard	6 468 20		
	PDU with 16 A MCB	6 outlets	British standard	6 468 24		
			German standard	6 468 23		
	PDU with 16 A 30 mA RCBO	6 outlets	French standard	6 468 22		
			German standard	6 468 31		
	PDU with surge protection	6 outlets	French standard	6 468 30		
			French standard	6 468 33		
	PDU with ammeter	6 outlets	German standard	6 468 36		
French standard			6 468 35			
German standard			6 468 41			
French standard			6 468 40			
C13 (IEC 60320 standard)			6 468 43			
C19 (IEC 60320 standard)	6 468 44					
ZERO-U POWER DISTRIBUTION UNITS (p. 735)						
SINGLE-PHASE						
	PDU standard	24 outlets	German standard	6 468 52		
			British standard	6 468 54		
			French standard	6 468 50		
			C13 (IEC 60320 standard)	6 468 56		
			20 C13 + 4 C19 (IEC 60320 standard)	6 468 60		
	PDU with ammeter	24 outlets	20 C13 + 4 C19 (IEC 60320 standard)	6 468 65		
THREE-PHASE						
	PDU standard	24 outlets	18 C13 + 6 C19 (IEC 60320 standard)	6 468 70		
	PDU with ammeter	24 outlets	18 C13 + 6 C19 (IEC 60320 standard)	6 468 75		
MULTI-APPLICATION 19" DIN RAIL						
	19" DIN rail Kit	DIN Rail with front cover		0 465 46		
		Rear cover		0 465 47		

1: Except for 6 U cabinet